

## Priority Queues

Sell	100	IBM	\$122
Sell	300	IBM	\$120
Buy	500	IBM	\$119
Buy	400	IBM	\$118

1/27/2005 2:03 AM

Priority Queues

1

## Outline and Reading

- ◆ PriorityQueue ADT (§2.4.1)
- ◆ Total order relation (§2.4.1)
- ◆ Comparator ADT (§2.4.1)
- ◆ Sorting with a priority queue (§2.4.2)
- ◆ Selection-sort (§2.4.2)
- ◆ Insertion-sort (§2.4.2)

1/27/2005 2:03 AM

Priority Queues

2

## Priority Queue ADT

- ◆ A priority queue stores a collection of items
- ◆ An item is a pair (key, element)
- ◆ Main methods of the Priority Queue ADT
  - `insertItem(k, o)`  
inserts an item with key  $k$  and element  $o$
  - `removeMin()`  
removes the item with smallest key and returns its element
- ◆ Additional methods
  - `minKey()`  
returns, but does not remove, the smallest key of an item
  - `minElement()`  
returns, but does not remove, the element of an item with smallest key
  - `size()`, `isEmpty()`
- ◆ Applications:
  - Standby flyers
  - Auctions
  - Stock market

1/27/2005 2:03 AM

Priority Queues

3

## Total Order Relation

- ◆ Keys in a priority queue can be arbitrary objects on which an order is defined
- ◆ Two distinct items in a priority queue can have the same key
- ◆ Mathematical concept of total order relation  $\leq$ 
  - Reflexive property:  
 $x \leq x$
  - Antisymmetric property:  
 $x \leq y \wedge y \leq x \Rightarrow x = y$
  - Transitive property:  
 $x \leq y \wedge y \leq z \Rightarrow x \leq z$

1/27/2005 2:03 AM

Priority Queues

4

## Comparator ADT

- ◆ A comparator encapsulates the action of comparing two objects according to a given total order relation
- ◆ A generic priority queue uses an auxiliary comparator
- ◆ The comparator is external to the keys being compared
- ◆ When the priority queue needs to compare two keys, it uses its comparator
- ◆ Methods of the Comparator ADT, all with Boolean return type
  - `isLessThan(x, y)`
  - `isLessThanOrEqualTo(x,y)`
  - `isEqualTo(x,y)`
  - `isGreaterThan(x, y)`
  - `isGreaterThanOrEqualTo(x,y)`
  - `isComparable(x)`

1/27/2005 2:03 AM

Priority Queues

5

## Sorting with a Priority Queue

- ◆ We can use a priority queue to sort a set of comparable elements
  1. Insert the elements one by one with a series of `insertItem(e, e)` operations
  2. Remove the elements in sorted order with a series of `removeMin()` operations
- ◆ The running time of this sorting method depends on the priority queue implementation

### Algorithm *PQ-Sort(S, C)*

**Input** sequence  $S$ , comparator  $C$  for the elements of  $S$

**Output** sequence  $S$  sorted in increasing order according to  $C$

$P \leftarrow$  priority queue with comparator  $C$

**while**  $\neg S.isEmpty()$

$e \leftarrow S.remove(S.first())$

$P.insertItem(e, e)$

**while**  $\neg P.isEmpty()$

$e \leftarrow P.removeMin()$

$S.insertLast(e)$

1/27/2005 2:03 AM

Priority Queues

6

## Sequence-based Priority Queue

- ◆ Implementation with an unsorted sequence
  - Store the items of the priority queue in a list-based sequence, in arbitrary order
- ◆ Performance:
  - `insertItem` takes  $O(1)$  time since we can insert the item at the beginning or end of the sequence
  - `removeMin`, `minKey` and `minElement` take  $O(n)$  time since we have to traverse the entire sequence to find the smallest key
- ◆ Implementation with a sorted sequence
  - Store the items of the priority queue in a sequence, sorted by key
- ◆ Performance:
  - `insertItem` takes  $O(n)$  time since we have to find the place where to insert the item
  - `removeMin`, `minKey` and `minElement` take  $O(1)$  time since the smallest key is at the beginning of the sequence

1/27/2005 2:03 AM

Priority Queues

7

## Selection-Sort

- ◆ Selection-sort is the variation of PQ-sort where the priority queue is implemented with an unsorted sequence
- ◆ Running time of Selection-sort:
  1. Inserting the elements into the priority queue with  $n$  `insertItem` operations takes  $O(n)$  time
  2. Removing the elements in sorted order from the priority queue with  $n$  `removeMin` operations takes time proportional to
 
$$1 + 2 + \dots + n$$
- ◆ Selection-sort runs in  $O(n^2)$  time

1/27/2005 2:03 AM

Priority Queues

8

## Insertion-Sort

- ◆ Insertion-sort is the variation of PQ-sort where the priority queue is implemented with a sorted sequence
- ◆ Running time of Insertion-sort:
  1. Inserting the elements into the priority queue with  $n$  `insertItem` operations takes time proportional to  $1 + 2 + \dots + n$
  2. Removing the elements in sorted order from the priority queue with a series of  $n$  `removeMin` operations takes  $O(n)$  time
- ◆ Insertion-sort runs in  $O(n^2)$  time


1/27/2005 2:03 AM

Priority Queues

9

## In-place Insertion-sort

- ◆ Instead of using an external data structure, we can implement selection-sort and insertion-sort in-place
- ◆ A portion of the input sequence itself serves as the priority queue
- ◆ For in-place insertion-sort
  - We keep sorted the initial portion of the sequence
  - We can use `swapElements` instead of modifying the sequence

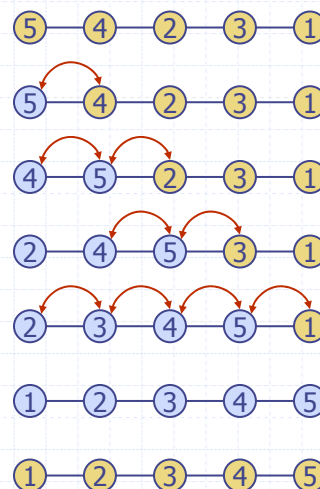

1/27/2005 2:03 AM

Priority Queues

10